


# RCD series

## Cabinet Dryer

### 机器特点

#### The characters of the machine

- 采用P.I.D.温度控制，达到精密的均匀的烘干效果。
- 保温密封门可保持恒定的温度并降低热量损耗。
- 不锈钢材料的烤盘及内胆，可防止在烘干过程中污染原料。
- 优化设计，方便维修保养。
- 入风口、排风口采用可调式空气阀门，便于调节风量。
- 配置马达过载保护。
- 24小时定时装置，操作方便。
- 配备独立温度控制器，超温保护警示。
- 可依需求定制烤盘或整机特制。
- P.I.D. temperature control so as to achieve an accurate even drying effect.
- Air tight insulating door can keep temperature constant inside and reduce energy consumption.
- Stainless steel tray and liner bring no contamination to material.
- Optimized design so as to repair and maintain easiliy.
- Adjustable air valve at air inlet and outlet so as to adjust wind strength.
- Overload protection on motor.
- 24-hour timer, easy to operate.
- Equipped with separate temperature controller and alarm for overheat.
- Tray and whole dryer can be custom-made according your specifications.

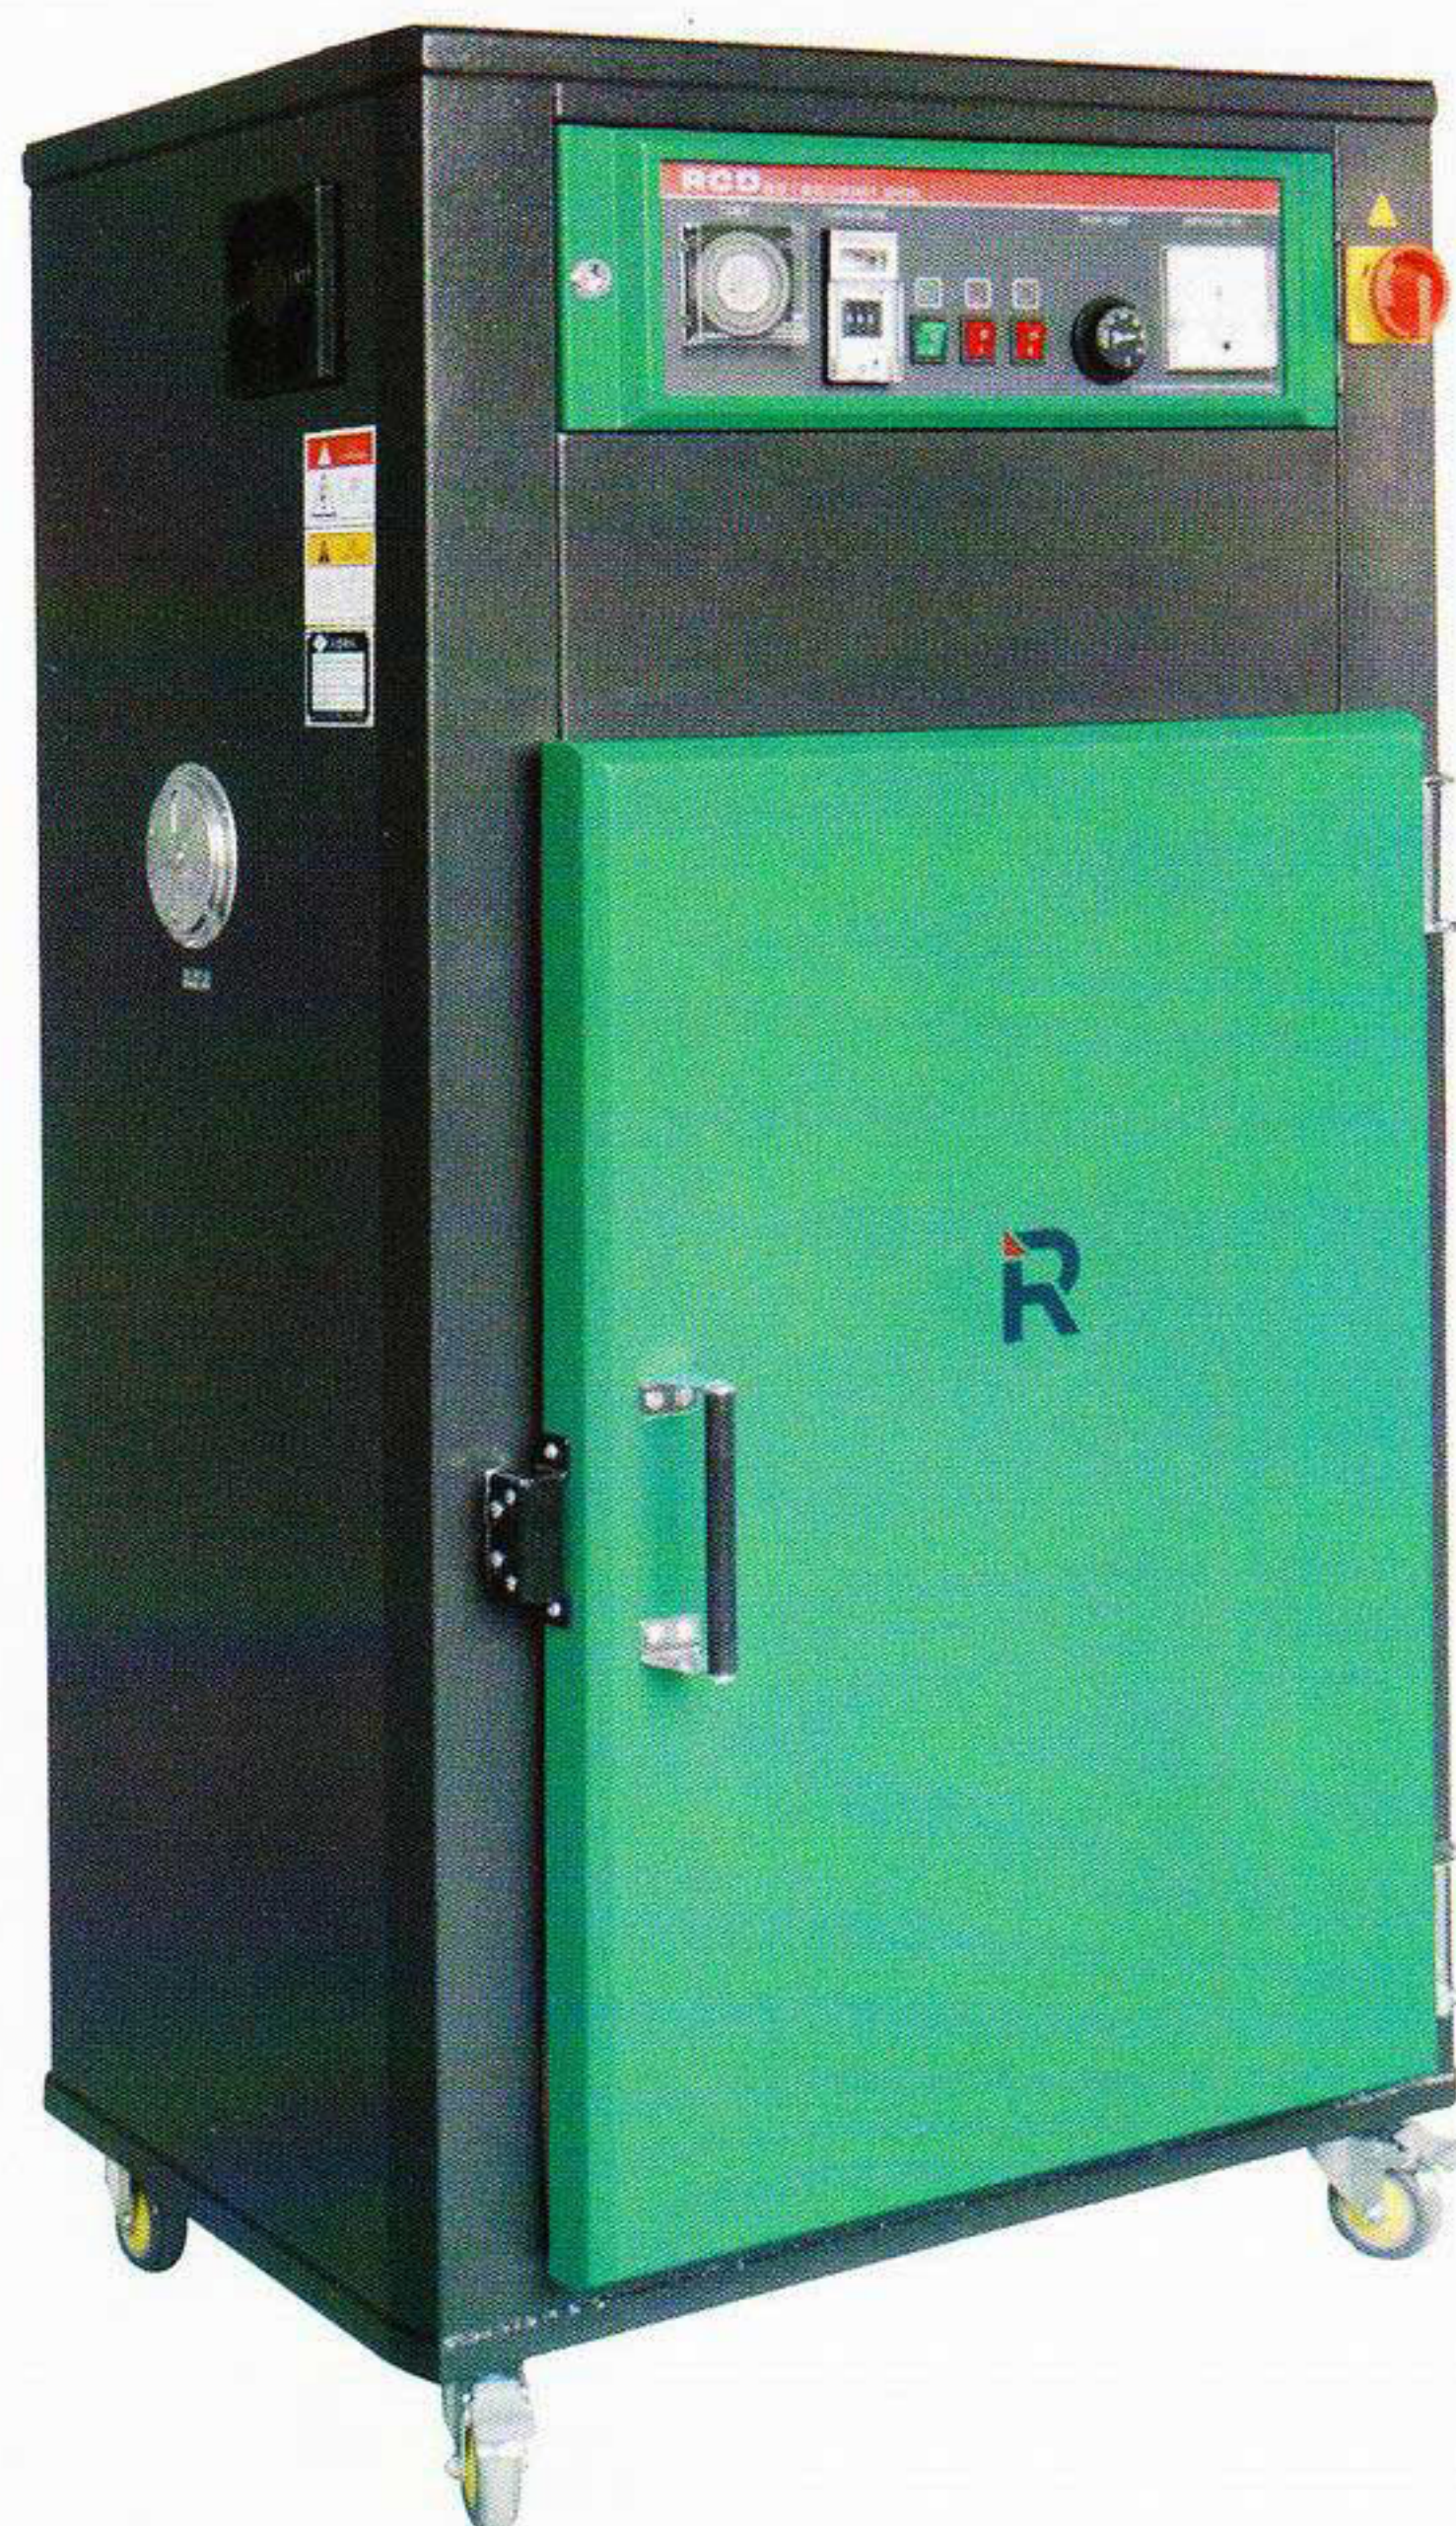

## RCD series Cabinet Dryer

The RCD series of cabinet dryers are used to simultaneously dry different kinds plastics in small quantity or material for trial moulding. They can be applied in dustries of electronic engineering, electroplating, pharmacy, paint baking, printing industries and etc.for preheating or drying related products.

RCD箱型干燥机适用于所有种类的聚合物材料烘干，并能同时烘干不同的材料，非常适合于少量、多样性的原料或试模时使用，也可用于电子、电机、电镀、烤漆、印刷等多行业相关产品的预热或干燥处理。

### Specifications 规格表

参数Parameter 规格Specifications	机型Model	RCD-5	RCD-9	RCD-20
电机功率 Heat Power	Kw	4	4.5	9
风车马达 Blower Power	Kw	0.37	0.37	1.5
温控范围 Temperature Range	℃	250	250	250
盘架数 Shelf Qty	盘	5	9	20
装料量 Loading Capa	Kg	50	100	200
内部尺寸 HxWxD Internal Size	mm	580x580x500	880x580x500	1000x970x800
外部尺寸 HxWxD External Size	mm	1200x780x600	1500x780x600	1750x1210x950
重量 Weight	Kg	150	180	450

产品规格若有变更,恕不另行通知。  
Please excuse for not note if some specifications of products are changed.

#### 注Note:

- 1) 机器电压规格为3Ø, 220V/380V, 50/60Hz。  
The machine voltage specification is 3Ø, 220V/380V, 50/60Hz. The voltage can be changed as you require.

